

1 Anti-Slip\_ShowerTray\_Quadrant

Plan

| (a) mm | (b) mm | (c) mm | (d) mm | (e) mm |
|--------|--------|--------|--------|--------|
| 1000   | 1000   | 726    | 726    | 180    |
| 900    | 900    | 626    | 626    | 180    |
| 800    | 800    | 526    | 526    | 180    |

2 Anti-Slip\_ShowerTray\_Quadrant

Tray Size Schedule

#### DETAILED DESCRIPTION

SENSTEC Anti-Slip shower trays have a unique integrated profile that has been designed to not only increase grip levels, but is also comfortable to stand on and is easily cleaned. EN 14527 Class 1. The base of the Tray must be adequately supported.

#### ANTI-SLIP PROPERTIES

UKAS accredited laboratory results. Pendulum Test, BS 7976\_2:2002, With the NON REQUIRED addition of contaminant to reflect a showering environment, PTV value of 48. Ramp Test DIN 51097, Ramp angle of 30 degrees, best category classification of C. SENSTEC Ant-Slip properties fall into best possible classifications when tested to BS7976\_2:2002 and DIN 51097. User Experience testing carried out by University of Ulster showed 94% very positive.

#### MATERIAL

Gelcoat surface, stone resin fill.

#### DEPTH

36 mm.

#### COLOUR

Available in all colours.

#### WASTE

SENSTEC shower trays have been designed exclusively for use with McAlpine ST90CPB-S-HP2 or ST90CPB-S-70, with flow rates of 42 and 34 litres per minute respectively when tested in accordance with EN274-2:2002. <http://mcalpineplumbing.com>

3 Anti-Slip\_ShowerTray\_Quadrant

Detailed Description

#### NOTES:

##### WASTE

SENSTEC shower trays have been designed exclusively for use with McAlpine ST90CPB-S-HP2 or ST90CPB-S-70, with flow rates of 42 and 34 litres per minute respectively when tested in accordance with EN274-2:2002. <http://mcalpineplumbing.com>

##### WATERPROOFING

When installing a SENSTEC Anti-Slip shower tray it is recommended to use the Classi Bathroom Waterproofing range of products <http://waterproofyourbathroom.com/shower-trays>

##### CLEANING

Ensure that the tray is washed with soap and water and dried with a soft cloth after each use.

ORIGINAL BY SENSTEC DATE 10/04/2019


Contact  
SENSTEC | 185 Omagh Road | Ballygawley | Dungannon |  
Co. Tyrone | N.Ireland | BT70 2AL



**SENSTEC**  
ANTI-SLIP SHOWER TRAY

Drawing Name: Anti-Slip\_ShowerTray\_Quadrant Technical Data Sheet  
Drawing Number: SENSTEC-STC-XX-XX-DS-A-20-001  
Drawing Status: Information Rev: P1

THIS DRAWING IS PROPERTY OF SENSTEC AND REMAINS PROPERTY OF SENSTEC. ANY DRAWING DISCREPANCY SHOULD BE NOTIFIED TO THE DRAWING ORIGINATOR IMMEDIATELY. THIS DRAWING SHOULD NOT BE COPIED WITHOUT NOTIFICATION TO THE OWNER. THIS DRAWING IS FOR PLANNING PURPOSES ONLY & NO DIMENSIONS SCALING SHOULD BE USED FOR FABRICATION. ALL DIMENSIONS TO BE MEASURED ON SITE PRIOR TO MANUFACTURE OF ANY PROPOSALS

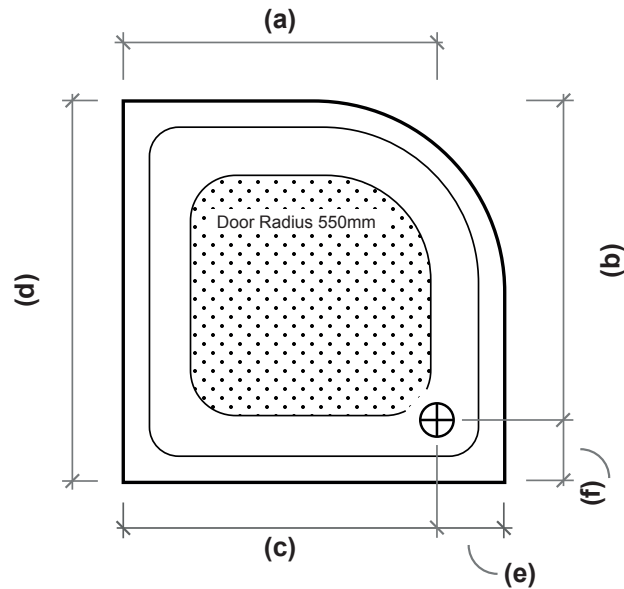

1 Anti-Slip\_ShowerTray\_Quadrant\_S900QUADBR

Plan

| (a) mm | (b) mm | (c) mm | (d) mm | (e) mm | (f) mm |
|--------|--------|--------|--------|--------|--------|
| 720    | 720    | 720    | 900    | 180    | 180    |

2 Anti-Slip\_ShowerTray\_Quadrant\_S900QUADBR

Tray Size Schedule

#### DETAILED DESCRIPTION

SENSTEC Anti-Slip shower trays have a unique integrated profile that has been designed to not only increase grip levels, but is also comfortable to stand on and is easily cleaned. EN 14527 Class 1. The base of the Tray must be adequately supported.

#### ANTI-SLIP PROPERTIES

UKAS accredited laboratory results. Pendulum Test, BS 7976\_2:2002, With the NON REQUIRED addition of contaminant to reflect a showering environment, PTV value of 48. Ramp Test DIN 51097, Ramp angle of 30 degrees, best category classification of C. Senstec Ant-Slip properties fall into best possible classifications when tested to BS7976\_2:2002 and DIN 51097. User Experience testing carried out by University of Ulster showed 94% very positive.

#### MATERIAL

Gelcoat surface, stone resin fill.

#### DEPTH

36 mm.

#### COLOUR

Available in all colours.

#### WASTE

SENSTEC shower trays have been designed exclusively for use with McAlpine ST90CPB-S-HP2 or ST90CPB-S-70, with flow rates of 42 and 34 litres per minute respectively when tested in accordance with EN274-2:2002. <http://mcalpineplumbing.com>

3 Anti-Slip\_ShowerTray\_Quadrant\_S900QUADBR Detailed Description

#### NOTES:

##### WASTE

SENSTEC shower trays have been designed exclusively for use with McAlpine ST90CPB-S-HP2 or ST90CPB-S-70, with flow rates of 42 and 34 litres per minute respectively when tested in accordance with EN274-2:2002. <http://mcalpineplumbing.com>

##### WATERPROOFING

When installing a SENSTEC Anti-Slip shower tray it is recommended to use the Classi Bathroom Waterproofing range of products <http://waterproofyourbathroom.com/shower-trays>

##### CLEANING

Ensure that the tray is washed with soap and water and dried with a soft cloth after each use.

ORIGINAL BY SENSTEC DATE 10/04/2019


Contact  
SENSTEC | 185 Omagh Road | Ballygawley | Dungannon |  
Co. Tyrone | N.Ireland | BT70 2AL



**SENSTEC**  
ANTI-SLIP SHOWER TRAY

Drawing Name: Anti-Slip\_ShowerTray\_Quadrant\_S900QUADBR Technical Data Sheet  
Drawing Number: SENSTEC-STC-XXX-DS-A-20-001  
Drawing Status: Information Rev: P1

THIS DRAWING IS PROPERTY OF SENSTEC AND REMAINS PROPERTY OF SENSTEC. ANY DRAWING DISCREPANCY SHOULD BE NOTIFIED TO THE DRAWING ORIGINATOR IMMEDIATELY. THIS DRAWING SHOULD NOT BE COPIED WITHOUT NOTIFICATION TO THE OWNER. THIS DRAWING IS FOR PLANNING PURPOSES ONLY & NO DIMENSIONS SCALING SHOULD BE USED FOR FABRICATION. ALL DIMENSIONS TO BE MEASURED ON SITE PRIOR TO MANUFACTURE OF ANY PROPOSALS

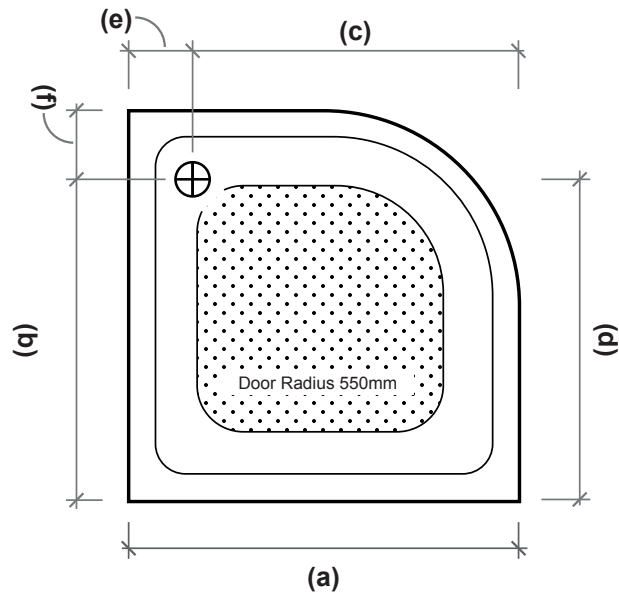

1

Anti-Slip\_ShowerTray\_Quadrant\_S900QUADTL

Plan

| (a) mm | (b) mm | (c) mm | (d) mm | (e) mm | (f) mm |
|--------|--------|--------|--------|--------|--------|
| 900    | 720    | 720    | 720    | 180    | 180    |

2

Anti-Slip\_ShowerTray\_Quadrant\_S900QUADTL

Tray Size Schedule

#### DETAILED DESCRIPTION

SENSTEC Anti-Slip shower trays have a unique integrated profile that has been designed to not only increase grip levels, but is also comfortable to stand on and is easily cleaned. EN 14527 Class 1. The base of the Tray must be adequately supported.

#### ANTI-SLIP PROPERTIES

UKAS accredited laboratory results. Pendulum Test, BS 7976\_2:2002, With the NON REQUIRED addition of contaminant to reflect a showering environment, PTV value of 48. Ramp Test DIN 51097, Ramp angle of 30 degrees, best category classification of C. Senstec Ant-Slip properties fall into best possible classifications when tested to BS7976\_2:2002 and DIN 51097. User Experience testing carried out by University of Ulster showed 94% very positive.

#### MATERIAL

Gelcoat surface, stone resin fill.

#### DEPTH

36 mm.

#### COLOUR

Available in all colours.

#### WASTE

SENSTEC shower trays have been designed exclusively for use with McAlpine ST90CPB-S-HP2 or ST90CPB-S-70, with flow rates of 42 and 34 litres per minute respectively when tested in accordance with EN274-2:2002. <http://mcalpineplumbing.com>

3

Anti-Slip\_ShowerTray\_Quadrant\_S900QUADTL Detailed Description

#### NOTES:

##### WASTE

SENSTEC shower trays have been designed exclusively for use with McAlpine ST90CPB-S-HP2 or ST90CPB-S-70, with flow rates of 42 and 34 litres per minute respectively when tested in accordance with EN274-2:2002. <http://mcalpineplumbing.com>

##### WATERPROOFING

When installing a SENSTEC Anti-Slip shower tray it is recommended to use the Classi Bathroom Waterproofing range of products <http://waterproofyourbathroom.com/shower-trays>

##### CLEANING

Ensure that the tray is washed with soap and water and dried with a soft cloth after each use.

ORIGINAL BY SENSTEC DATE 10/04/2019

Contact  
SENSTEC | 185 Omagh Road | Ballygawley | Dungannon |  
Co. Tyrone | N.Ireland | BT70 2AL



**SENSTEC**  
ANTI-SLIP SHOWER TRAY

Drawing Name: Anti-Slip\_ShowerTray\_Quadrant\_S900QUADTL Technical Data Sheet  
Drawing Number: SENSTEC-STC-XXX-DS-A-20-001  
Drawing Status: Information Rev: P1

THIS DRAWING IS PROPERTY OF SENSTEC AND REMAINS PROPERTY OF SENSTEC. ANY DRAWING DISCREPANCY SHOULD BE NOTIFIED TO THE DRAWING ORIGINATOR IMMEDIATELY. THIS DRAWING SHOULD NOT BE COPIED WITHOUT NOTIFICATION TO THE OWNER. THIS DRAWING IS FOR PLANNING PURPOSES ONLY & NO DIMENSIONS SCALING SHOULD BE USED FOR FABRICATION. ALL DIMENSIONS TO BE MEASURED ON SITE PRIOR TO MANUFACTURE OF ANY PROPOSALS